


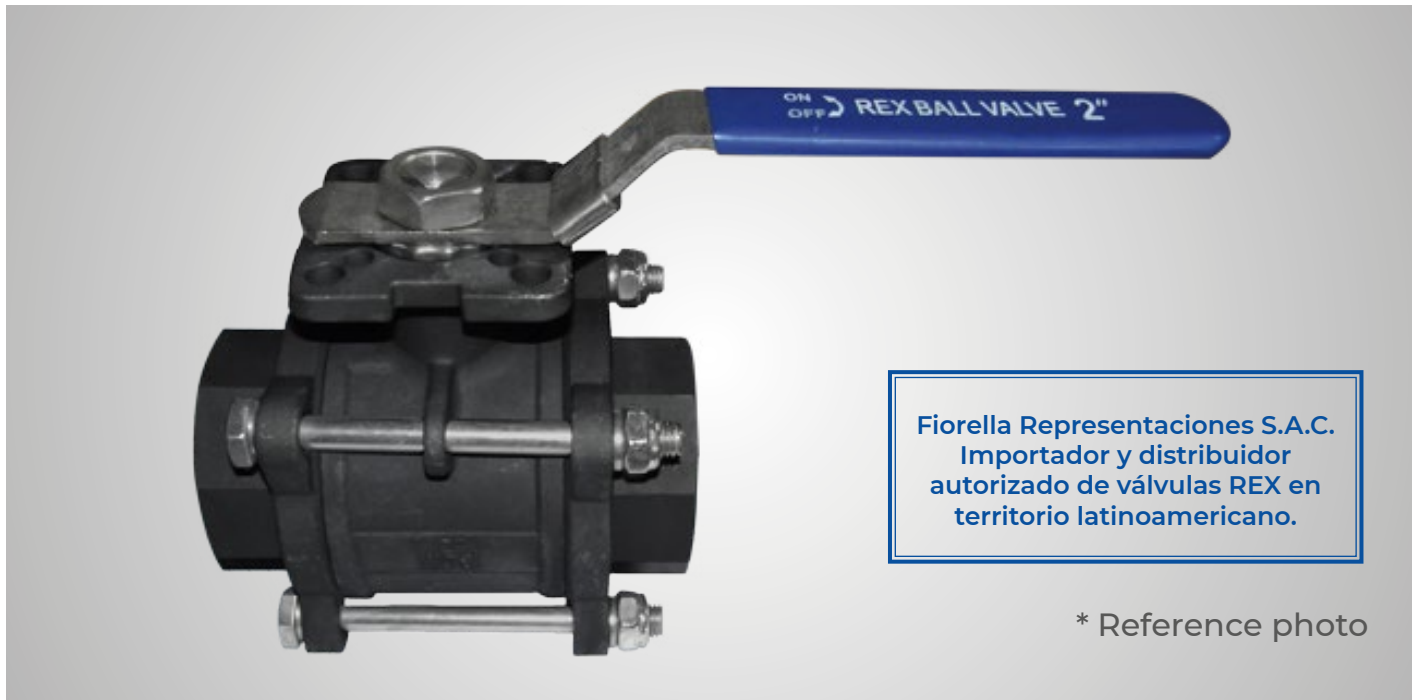

Fiorella Representaciones S.A.C.
 Importador y distribuidor
 autorizado de válvulas REX en
 territorio latinoamericano.

* Reference photo

Steel Body type A105 or A216 WCB.
 Ball SS 304 (optional 316)
 Seat
 POLYFILL (PTFE + 15% de Graphite | Black)
 Thread ends NPT ANSI/ASME B1.20.1


Featuring Memoryseal seating technology
 Three piece body. Full Passage
 Blow-Out-Proof Stem
 Mounting Pad ISO 5211
 Locking Device

Maximun Working Pressure:
 1000 PSIG

Maximum temperature operation:
 POLYFILL -28°C (-20°F) to 240°C (464°F)

Tests according to API 598
 Diameters: 1/4" to 2"

PRESSURE TEMPERATURE RATINGS

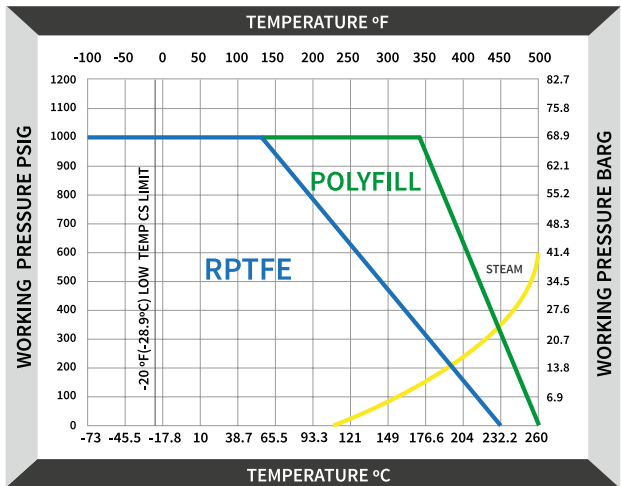

* Note : Dimensions, design and materials are subject to change without notice.

MAC - MMXXI




FIGRELLA
 Representaciones S.A.C.
 Importador y Distribuidor
 "Fuerres como el Acero"

www.fiorellarepre.com.pe

📍 Calle Omicrón N° 215, Callao, Perú
 ☎ (51-1) 319 6160 📞 (51) 998 373 362
 ✉ ventas_omi@fiorellarepre.com.pe

MATERIALS

	PART NAME	MATERIAL
1	BODY	ASTM A216 WCB
2	CAP	ASTM A216 WCB
3	BALL	ASTM A351 CF8M
4	STEM	ASTM A276 Gr. 304
5	SEAT	POLYFILL
6	PACKING	PTFE
7	GLAND	SS304
8	END SEALS	PTFE
9	THRUST WASHER	PTFE
10	HANDLE	SS304
11	HANDLE NUT	SS304
12	SPRING WASHER	SS304
13	BOLTS	ASTM A193 Gr. B8
14	BOLT NUTS	ASTM A194 Gr. 8
15	BOLT WASHERS	SS304
16	HANDLE SLEEVE	VINYL GRIP
17	LOCKING PLATE	SS304

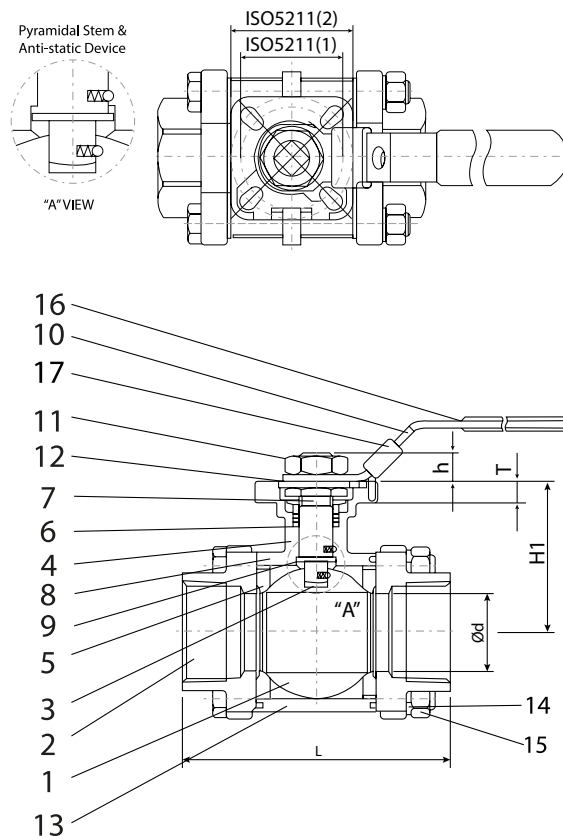

DIMENSIONS (mm)

SIZE	d	L	H ₁	H	T	ISO 5211	CV Factor	WEIGHT (Kg)
1/4"	14.1	65	7	40	7	F03 / F04	16	0.48
3/8"	17.6	65	8	40.5	7	F03 / F04	16	0.46
1/2"	15.0	71	9	42.5	9	F03 / F04	26	0.78
3/4"	20.0	85	9	46.5	9	F03 / F04	55	1.01
1"	25.4	95	12.0	59.5	9	F04 / F05	110	1.46
1 1/4"	32.0	111	12.0	63.0	9	F04 / F05	180	2.18
1 1/2"	40.0	121	16	79.0	13	F05 / F07	270	3.50
2"	50.8	140	16	86.9	13	F05 / F07	500	4.71

* Note : Dimensions, design and materials are subject to change without notice.