


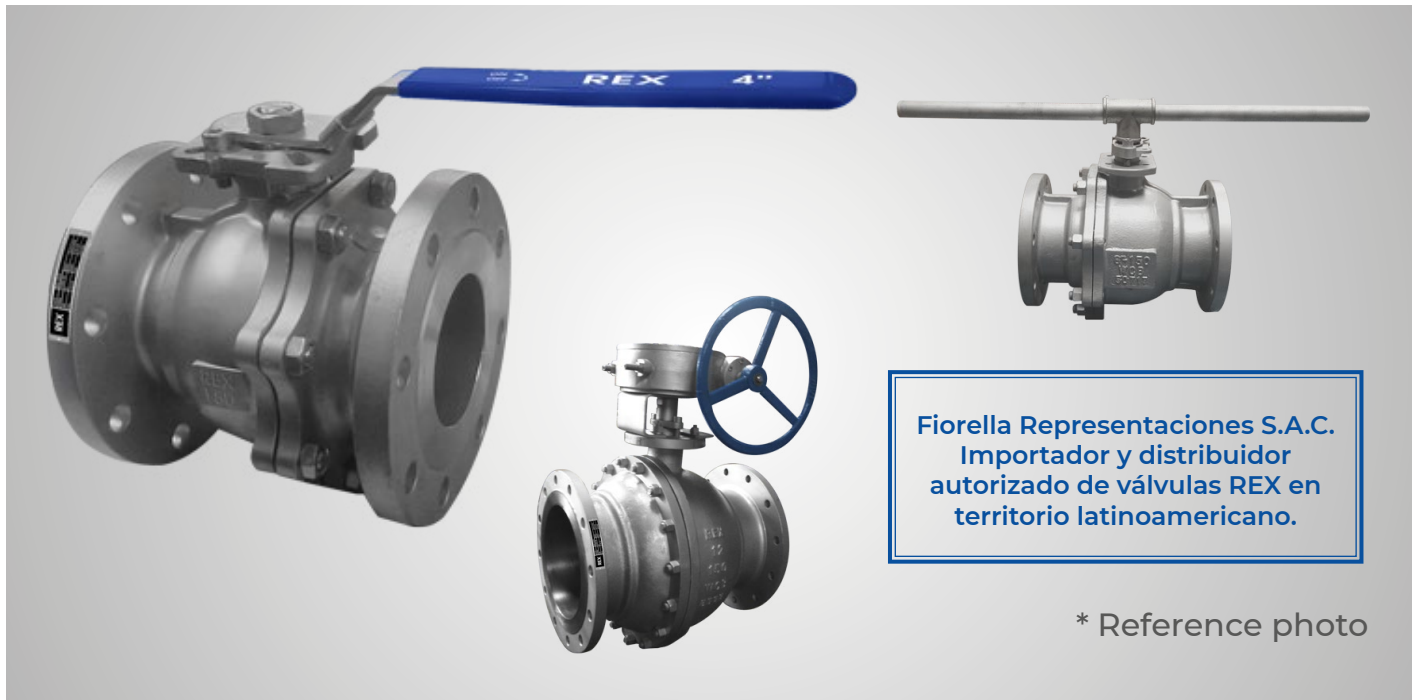


Fiorella Representaciones S.A.C.
Importador y distribuidor
autorizado de válvulas REX en
territorio latinoamericano.

* Reference photo

Steel Body Type A216 WCB.
Ball: SS 316 (Optional SS 304)
Seat: RPTFE (Optional Polyfill)
Featuring Memoryseal seating technology
Two piece body. Full Passage
Blow-Out-Proof Stem
Mounting Pad for Actuator ISO 5211
Operator ON/OFF:
Up to 4 inch with lever
From 6 inch tee-type lever or gearbox

Norm Steel Valves: ANSI/ASME B16.34
Flange dimensions: ANSI/ASME B16.5 RF
Face to Face dimensions: ANSI/ASME B16.10
Maximum Working Pressure:
285 PSIG @ -29°C to 38°C
150 PSI Steam
Tests according to API 598
Diameters: 2" to 12"

PRESSURE TEMPERATURE RATINGS

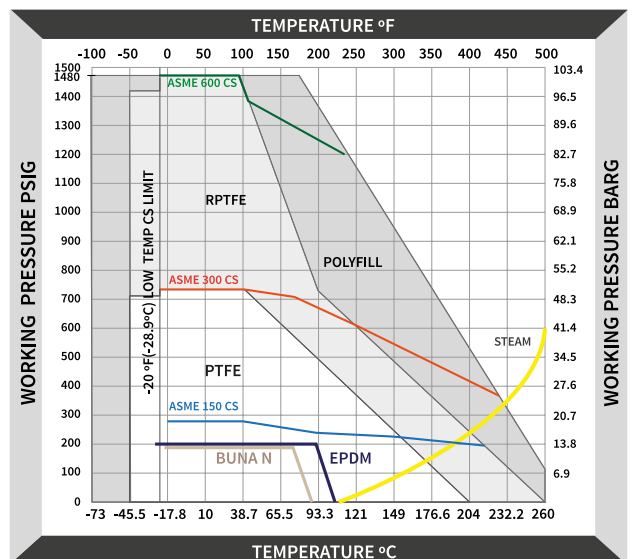

* Note : Dimensions, design and materials are subject to change without notice.

MAC - MMXXI




IORELLA
Representaciones S.A.C.
Importador y Distribuidor
"Fueres como el Acero"

www.fiorellarepre.com.pe

📍 Calle Omicrón N° 215, Callao, Perú
☎ (51-1) 319 6160 📞 (51) 998 373 362
✉ ventas_omi@fiorellarepre.com.pe

MATERIALS

	PART NAME	MATERIAL
1	BODY	ASTM A216 WCB
2	CAP	ASTM A216 WCB
3	BALL	ASTM A351 Gr. CF8M
4	STEM	ASTM A276 Gr. 304
5	SEAT	RPTFE
6	GASKET	PTFE
7	THRUST WASHER	PTFE
8	PACKING	PTFE
9	GLAND	ASTM A351 Gr. CF8
10	STOPPER	SS304
11	SNAP RING	SS304
12	GLAND BOLT	ASTM A193 Gr. B7
13	STUD BOLT	ASTM A193 Gr. B7
14	SET NUT	ASTM A194 Gr. 2H
15	HANDLE	ASTM A536 Gr. 65-45-12

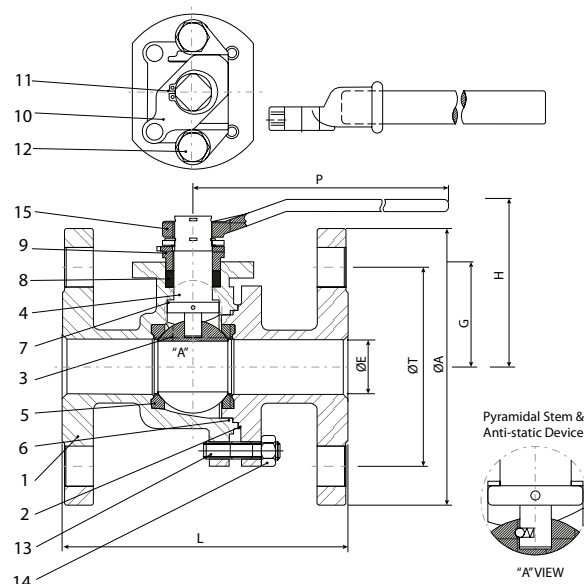

DIMENSIONS (mm)

SIZE	A	E	G	H	L	P	T	WEIGHT (Kg)
2"	152	50	61	123	178	206	120.5	24.9
2 1/2"	178	60	77	152	190.5	392	139.5	31
3"	191	76	95	158	203	306	152.5	36.9
4"	229	101	116	190	229	492	190.5	53.9
5"	254	127	108	240	123	510	216	70
6"	279	165	165	298	394	851	241.5	104
8"	343	212	212	---	458	1300	298.5	171
10"	406.5	250	250	---	533	---	362	253
12"	483.0	290	290	---	610	---	432	408

* Note : Dimensions, design and materials are subject to change without notice.