



Body of Ductile Iron A536
Designed in accordance
with API 609
Face to Face API 609
Flange Connections: ANSI/ASME B16.5 RF
class 150
Mounting actuator ISO 5211 adaptable

Disk stainless steel CF8M (316)
Seat elastometric: EPDM

Maximum working pressure:
200 PSIG

Maximum temperature operation:
EPDM -18°C (0°F) to 110°C (230°F)

Featuring Memoryseal seating technology
Operation Lever or Gearbox

Square shaft for mounting Lever or Gearbox

Hidrostatic test API 598
Diameters: 2" to 24"

NOTE: Soft seated valves are not recommen-
ded for steam service, hot and abrasive fluids.

* Certification pending to norm API 609 from
American Petroleum Institute



* Reference photo

Fiorella Representaciones S.A.C.
Importador y distribuidor
autorizado de válvulas REX en
territorio latinoamericano.

* Note : Dimensions, design and materials are subject to change without notice.

MAC - MMXXI




IORELLA
Representaciones S.A.C.
Importador y Distribuidor
"Fuerzas como el Acero"

www.fiorellarepre.com.pe

📍 Calle Omicrón N° 215, Callao, Perú
☎ (51-1) 319 6160 📞 (51) 998 373 362
✉ ventas_omi@fiorellarepre.com.pe

MATERIALS

	PART NAME	MATERIAL
1	STEM	STAINLESS STEELSS 410
2	BODY	DUCTILE CAST IRON ASTM A536
3	DISK	CF8M
4	SEAT	EPDM
5	END CAP	DUCTILE CAST IRON ASTM A536
6	BOLT	STEEL
7	TAPER PIN	SS 304 or SS316
8	O-RING	EPDM
9	BUSHING	PTFE
10	KEY	CARBON STEEL

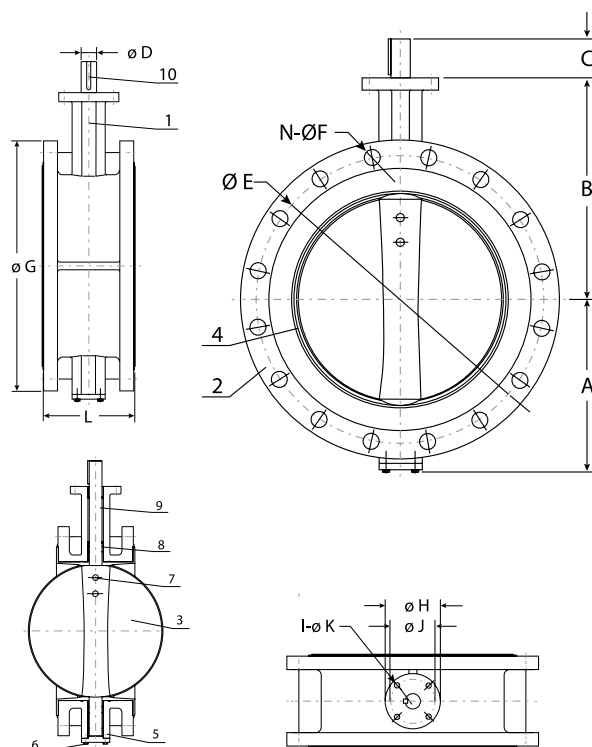

DIMENSIONS (mm)

SIZE	A	B	C	D	E	N-F	G	H	J	I-K	L	N° HOLES ANSI	WEIGHT (Kg)
2"	70	130	32	12.7	120.7	4-19	152	90	70	4-9.5	108	4	9.98
2 1/2"	75	140	32	12.7	139.7	4-19	178	90	70	4-9.5	112	4	10.88
3"	85	150	32	12.7	152.4	4-19	191	90	70	4-9.5	114	4	12.70
4"	104	160	32	15.9	190.5	8-19	229	90	70	4-9.5	127	8	15.87
5"	112	180	32	19.1	215.9	8-22	254	90	70	4-9.5	140	8	20.41
6"	130	200	32	19.1	241.3	8-22	279	90	70	4-9.5	140	8	26.76
8"	160	230	38	22.2	298.5	8-22	343	125	102	4-11.5	152	8	31.75
10"	194	260	38	28.6	362	12-25	406	125	102	4-11.5	165	12	59.86
12"	220	300	38	31.8	431.8	12-25	483	125	102	4-11.5	178	12	80.73

* Note : Dimensions, design and materials are subject to change without notice.