



Body and Bonnet Cast Steel A216 WCB
Bolted Bonnet

Rising Stem OS&Y

Norm Steel Valves: ANSI/ASME B16.34

Flange dimensions: ANSI/ASME B16.5 RF

Face to Face dimensions: ANSI/ASME B16.10

Hydrostatic Testing API 598

Diameters: 2" to 12"

PRESSURE TEMPERATURE RATINGS

Temperature °F/°C	Pressure worked lbs/inch ² (PSI)
	Class 300
(-) 20 °F / (-) 29 °C to (+) 100 °F / (+) 38 °C	740
200 °F / 93 °C	675
300 °F / 149 °C	655
400 °F / 204 °C	635
500 °F / 260 °C	600
600 °F / 316 °C	550
650 °F / 343 °C	535
700 °F / 371 °C	535
750 °F / 399 °C	505
800 °F / 427 °C	410
850 °F / 454 °C	270
900 °F / 482 °C	170
950 °F / 510 °C	105
1000 °F / 538 °C	50



* Reference photo


Fiorella Representaciones S.A.C.
Importador y distribuidor
autorizado de válvulas REX en
territorio latinoamericano.

* Note : Dimensions, design and materials are subject to change without notice.

MAC - MMXXI

MATERIALS

	PART NAME	MATERIAL
1	BODY BONNET	ASTM A216 WCB
2	SEAT RING	ASTM A216 WCB + 13% Cr
3	DISK	ASTM A216 WCB + 13% Cr
4	STEM	SS 410
5	STUD	ASTM A193 B7
6	NUT	ASTM A194 2H
7	GASKET	13Cr / GRAPH.
8	PACKING	GRAPHITE
9	STEM NUT	ASTM A439 D-2 or ASTM B62

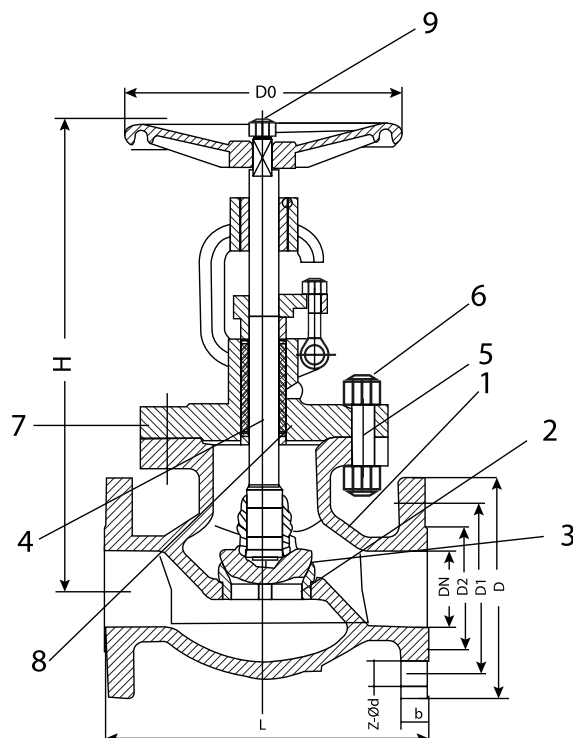

DIMENSIONS (mm)

SIZE	L	D	D ₁	D ₂	B	Z-ød	D ₀	H	WEIGHT (Kg)
2"	267	165	127	92	23	8-19	250	386	31
2 1/2"	292	190	149	105	26	8-22	250	410	38
3"	318	210	168.5	127	29	8-22	250	440	45
4"	356	254	200	157	32	8-22	350	495	64
5"	400	279	235	186	35	8-22	350	696	80
6"	445	318	270	216	37	12-22	450	777	120
8"	559	381	330	270	42	12-25	600	919	240
10"	622	445	387.5	324	48	16-29	700	1036	385
12"	711	521	451	381	51	26-32	800	1201	630

* Note : Dimensions, design and materials are subject to change without notice.

MAC - MMXXI



IORELLA
Representaciones S.A.C.
Importador y Distribuidor
"Fueres como el Acero"

www.fiorellarepre.com.pe

📍 Calle Omicrón N° 215, Callao, Perú
☎ (51-1) 319 6160 📞 (51) 998 373 362
✉ ventas_omi@fiorellarepre.com.pe