


* Reference photo

DESIGN FEATURES:

Face to face: ANSI/ASME B16.10
Flange dimension: ANSI/ASME B16.5 RF
Wall thickness: ANSI/ASME B16.34
Base with actuator for direct mounting
According to standard NAMUR ISO 5211
Opening drive lever
Test standard: API 598

MATERIAL LIST

	PART NAME	MATERIAL	QTY.
1	BODY	ASTM A351 Gr. CF8M	1
2	CAP	ASTM A351 Gr. CF8M	1
3	BALL	ASTM A351 Gr. CF8M	1
4	STEM	ASTM A276 Gr. 316	1
5	SEAT	RPTFE (PTFE + 15% G/F)	2
6	GASKET	GRAFOIL	1
7	THRUST WASHER	PTFE	1
8	PACKING	GRAFOIL	1
9	GLAND	ASTM A351 Gr. CF8	1
10	STOPPER	SS304	1
11	SNAP RING	SS304	2
12	GLAND BOLT	ASTM A193 Gr. B8	2
13	STUD BOLT	ASTM A193 Gr. B8	4-12
14	SET NUT	ASTM A194 Gr. 8M	4-12
15	HANDLE	STAINLESS STEEL	1

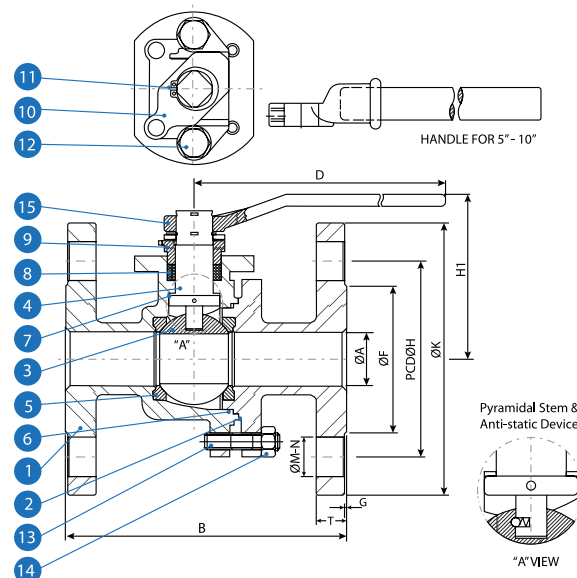


DIMENSIONS (mm)

SIZE	A	B	F	G	H	K	T	M	N	D	H1	CV Factor	WEIGHT (Kg)
1/2"	15.0	107.9	35.0	1.6	60.4	88.9	11.1	15.7	4	130	73.5	26	2.00
3/4"	20.0	117.3	42.9	1.6	69.8	98.5	11.1	15.7	4	130	76.0	55	2.50
1"	25.0	127.0	50.8	1.6	79.2	107.9	11.1	15.7	4	164	94.5	110	3.00
1 1/4"	32.0	139.7	63.5	1.6	88.9	117.3	12.7	15.7	4	164	100.0	180	4.50
1 1/2"	38.0	165.1	73.1	1.6	98.5	127.0	14.2	15.7	4	205	119.0	270	6.00
2"	50.0	177.8	91.9	1.6	120.6	152.4	15.7	19.0	4	205	131.5	500	8.50
2 1/2"	65.0	190.5	104.6	1.6	139.7	177.8	17.5	19.0	4	205	134.5	800	13.00
3"	80.0	203.2	127.0	1.6	152.4	190.5	19.0	19.0	4	326	155.0	1150	18.00
4"	100.0	228.6	157.2	1.6	190.5	228.6	23.8	19.0	8	326	176.0	2120	28.00

Fiorella Representaciones S.A.C. Importador y distribuidor autorizado de válvulas SUN en territorio latinoamericano.

PRESSURE TEMPERATURE RATINGS

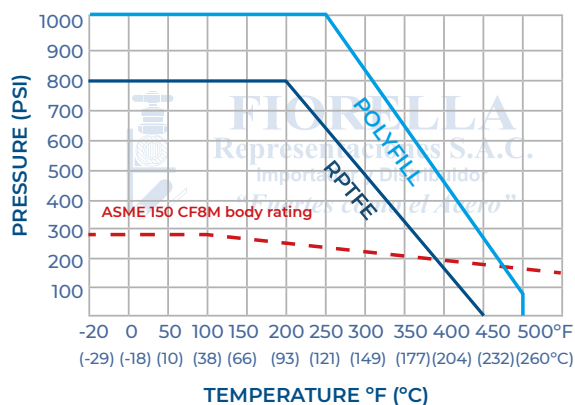

* Note : Dimensions, design and materials are subject to change without notice.