

DESIGN FEATURES:


Investment casting
Screwed-in bonnet
Rising stem
T handle or handwheel operation
Connecting threads: NPT ANSI/ASME B1.20.1
Working pressure: 6000 lb/in²
Female x female (fxf) threaded ends
Test standard: API 598

* Reference photo

MATERIAL LIST

	PART NAME	MATERIAL	QTY.
1	SET SCREW	SS304	1
2	HANDLE	SS410	1
3	STEM	SS316	1
4	GLAND NUT	SS304	1
5	GLAND	SS304	1
6	PACKING	TEFLON	1
7	BONNET	ASTM A351 Gr. CF8M	1
8	BODY	ASTM A351 Gr. CF8M	1

Fiorella Representaciones S.A.C.
Importador y distribuidor autorizado
de válvulas SUN en territorio
latinoamericano.

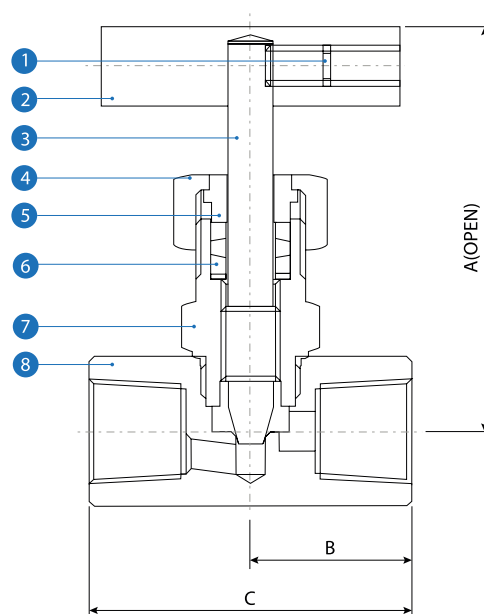

DIMENSIONS (mm)

SIZE	L	LI	T	WEIGHT (Kg)
1/8"	75	29.0	58	0.35
1/4"	75	29.0	58	0.35
3/8"	75	29.0	58	0.35
1/2"	87	32.5	65	0.56
3/4"	90	35.0	70	0.70
1"	103	40.0	80	1.30

* Note : Dimensions, design and materials are subject to change without notice.

MAC - MMXXI



FIORELLA
Representaciones S.A.C.
Importador y Distribuidor
"Fueres como el Acero"

www.fiorellarepre.com.pe

📍 Calle Omicrón N° 215, Callao, Perú
☎ (51-1) 319 6160 📞 (51) 998 373 362
✉ ventas_omi@fiorellarepre.com.pe